

Angle Radiator Valve

KAS[®]




TECHNICAL DATA SHEET


Product Name	Angle Radiator Valve
Standard	TS 579
Working Temperature	120°C
Pressure Class	PN 10
Intended Use	Heating Systems

DIMENSIONS

Code	04.01.307
DN	15
D1 (thread)	Rp 1/2"
D2 (thread)	Rp 1/2"
L1 (max-min)	71,3 - 79,3
L2	52,2
SW1	30
SW2	27

Dimensions are in "milimeter"

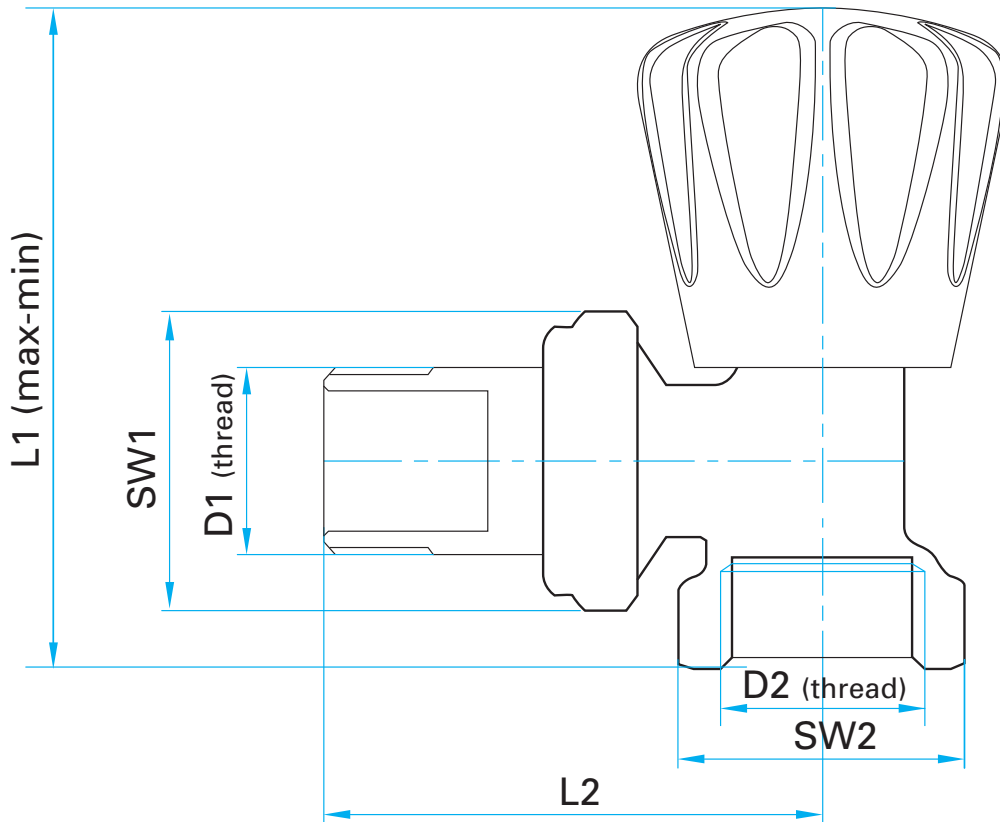



Angle Radiator Valve



MATERIALS

Body	Brass (CW617N) / (CW614N)
Spindle	Brass (CW617N) / (CW614N)
Nuts	Brass (CW617N) / (CW614N)
Tube	Brass (CW617N) / (CW614N)
Handle	ABS
Seals	NBR / EPDM

SURFACES FINISH

Body	Nickel - plated
Nuts	Nickel - plated
Tube	Nickel - plated

INSTALLATION and OPERATING INSTRUCTION

- 1-** Make sure there is no damage on the product may occur during transport and shipping. Before assembly do not unpack the product in order to prevent from the external effects.
- 2-** Clean all kinds of contaminants before assembly.
- 3-** Make sure that the thread length to be connected to the valve is not too short or too long than the thread length of the valve.
- 4-** Keep the valve in closed position during installation. Install the valve with the appropriate tool from the side where you'll mount it.
- 5- Use enough flax or plumping adhesive.**
- 6-** While opening and closing the valve, follow the arrows on the handle.
- 7-** Do not paint the valve, do not expose the valve with abrasive chemicals.
- 8-** Do not open or close with any other tool and do not remove the handle.